

## XLINNEA.LL



INFO  
MORE LANGUAGES

[www.varonaleds.com/arq\\_catalogue/XLINNEALL.pdf](http://www.varonaleds.com/arq_catalogue/XLINNEALL.pdf)







### DESCRIPTION

XLINNEA.LL is a 3W LED liner. Its high luminous flux makes them suitable for façade lighting and a great variety of spectacular light effects. It is efficient, robust and very versatile.

### MATERIALS

Heavy duty aluminum body  
Tempered glass cover  
Polyester powder coating on surface

### TECHNICAL









	CREE XP-G2 LEDs		230Vac/24Vdc
	IP65		3W@700mA
	-35°C/50°C		6192lm




## REFERENCE

Reference	Series	Voltage	Power	Color	Control	LED Qty.	Lumens	Length
VL-1040/60-C-OP	XLINNEA.LL	230 Vac	40 W	C	-	18 pcs	1798 lm	600 mm
VL-1041/60-RGB-OP	XLINNEA.LL	24 Vdc	43 W	RGB	DMX512	18 pcs	2697 lm	600 mm
VL-1042/100-C-OP	XLINNEA.LL	230 Vac	65 W	C	-	27 pcs	4644 lm	1000 mm
VL-1043/100-RGB-OP	XLINNEA.LL	24 Vdc	70 W	RGB	DMX512	27 pcs	2697 lm	1000 mm
VL-1044/120-C-OP	XLINNEA.LL	230 Vac	80 W	C	-	36 pcs	6192 lm	1200 mm
VL-1045/120-RGB-OP	XLINNEA.LL	24 Vdc	85 W	RGB	DMX512	36 pcs	3596 lm	1200 mm

## COLORS

	Code: R 750nm
	Code: G 750nm
	Code: B 750nm
	Code: Y 750nm
<hr/>	
	Code: WW 3000K
	Code: NW 4500K
	Code: CW 6000K
<hr/>	
	Code: RGB DMX512

## DIMENSIONS

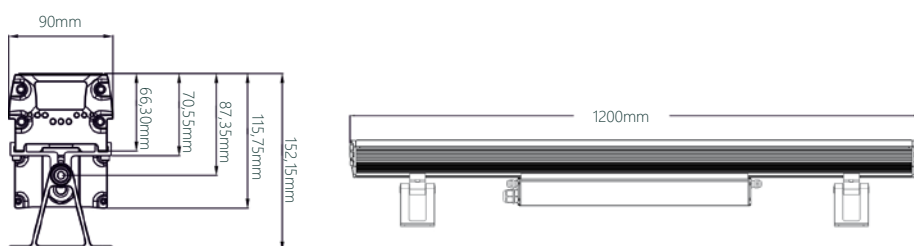

## OPTICS

