

---

## SLINK .15 & 30

---



INFO  
MORE LANGUAGES

[www.varonaleds.com/arq\\_catalogue/SLINK15&30.pdf](http://www.varonaleds.com/arq_catalogue/SLINK15&30.pdf)







### DESCRIPTION

SLINK projectors are wall mounted luminaires for outdoor decorative lighting. Available in round and square shapes with different powers.

### MATERIALS

Heavy duty aluminum body  
Tempered glass cover  
Akzo Nobel powder coating

### TECHNICAL


	CREE XP-G2 LEDs		230Vac
	IP65		1W@350mA
	-35°C/50°C		4440lm



## REFERENCE

Reference	Series	Voltage	Power	LED Qty.	Lumens	Light
VL-5016-C-OP	SLINK.15	230 Vac	23 W	15 pcs	2220 lm	Up
VL-5017-C-OP	SLINK.30	230 Vac	36 W	30 pcs	4440 lm	Up&Down

## DIMENSIONS

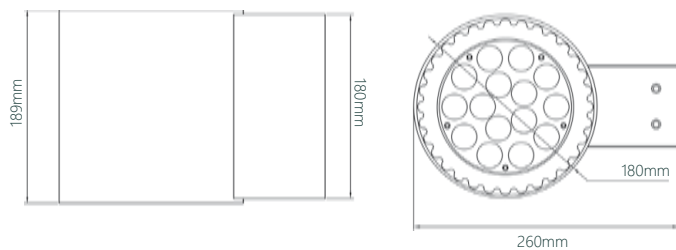

## COLORS

<span style="color: red;">■</span>	Code: R 750nm
<span style="color: green;">■</span>	Code: G 750nm
<span style="color: blue;">■</span>	Code: B 750nm
<span style="color: yellow;">■</span>	Code: Y 750nm
<hr/>	
<span style="color: yellow;">■</span>	Code: WW 3000K
<span style="color: lightyellow;">■</span>	Code: NW 4500K
<span style="border: 1px solid black; display: inline-block; width: 10px; height: 10px;"></span>	Code: CW 6000K

## OPTICS

