
SLINK.D



INFO
MORE LANGUAGES
www.varonaleds.com/arq_catalogue/SLINKD.pdf







DESCRIPTION


SLINK projectors are wall mounted luminaires for outdoor decorative lighting. Available in round and square shapes with different powers.

MATERIALS

Heavy duty aluminum body
Tempered glass cover
Akzo Nobel powder coating

TECHNICAL

	CREE XP-G2 LEDs		230Vac
	IP67		2W@500mA
	-35°C/50°C		317lm

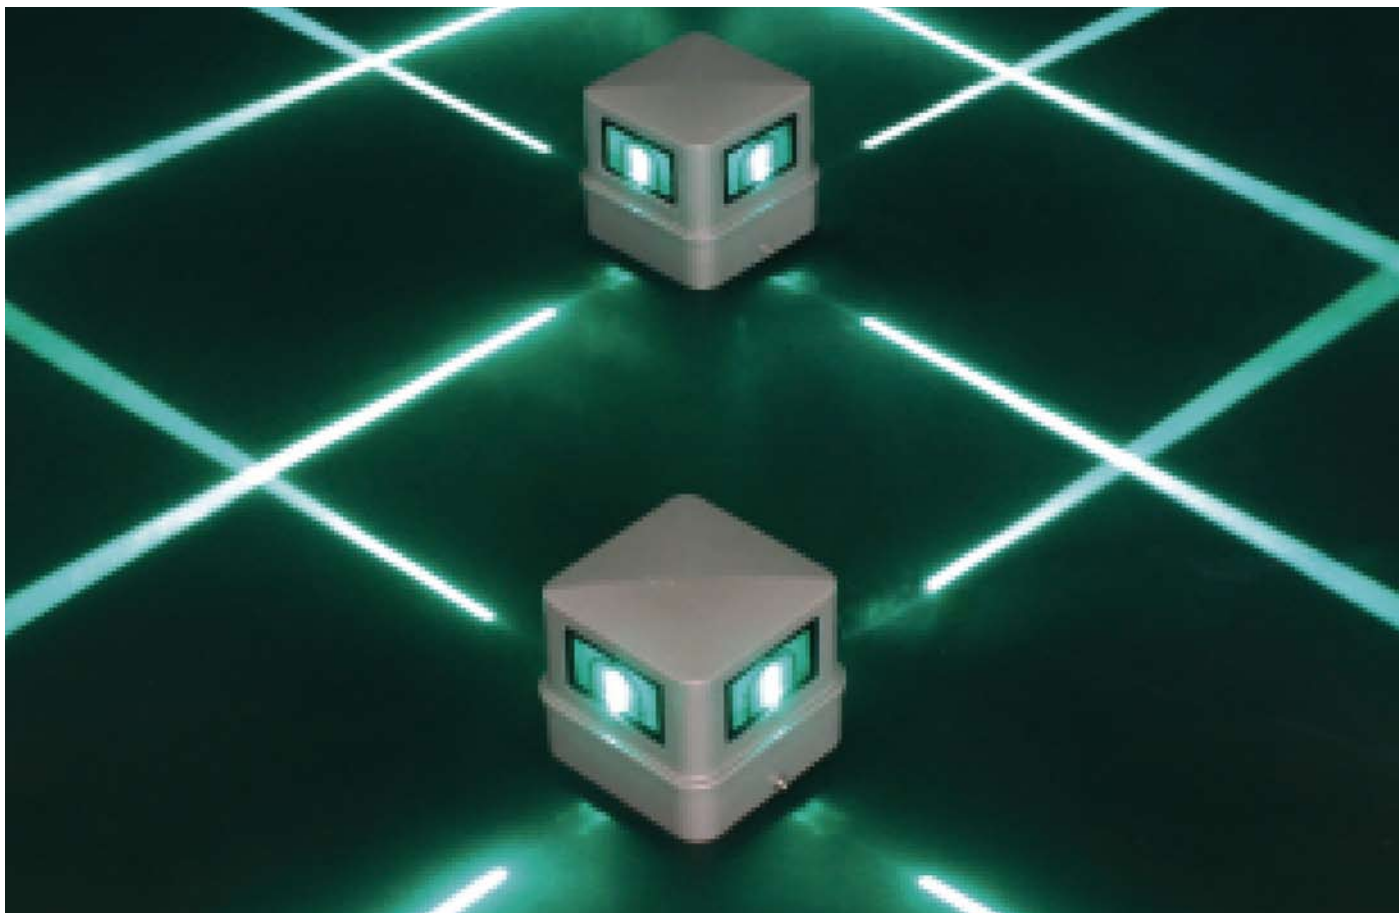

REFERENCE


Reference	Series	Voltage	Power	LED Qty.	Lumens
VL-5100-C-OP	SLINK.D	230 Vac	5,7 W	2 pcs	154 lm
VL-5101-C-OP	SLINK.D	230 Vac	10,8 W	4 pcs	317 lm

COLORS

- Code: R
750nm
- Code: G
750nm
- Code: B
750nm
- Code: Y
750nm

- Code: WW
3000K
- Code: NW
4500K
- Code: CW
6000K

DIMENSIONS

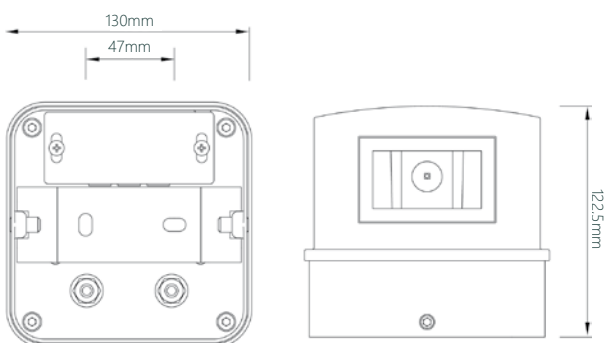

OPTICS

