
SLINK.9&18



INFO
MORE LANGUAGES

www.varonaleds.com/arq_catalogue/SLINK9&18.pdf







DESCRIPTION

SLINK projectors are wall mounted luminaires for outdoor decorative lighting. Available in round and square shapes with different powers.

MATERIALS

Heavy duty aluminum body
Tempered glass cover
Akzo Nobel powder coating

TECHNICAL

	CREE XP-G2 LEDs		230Vac
	IP65		1W@350mA
	-35°C/50°C		1620lm




REFERENCE

Reference	Series	Voltage	Power	LED Qty.	Lumens	Light
VL-5014-C-OP	SLINK.9	230 Vac	13,0 W	9 pcs	810 lm	Up
VL-5015-C-OP	SLINK.18	230 Vac	28 W	18 pcs	1620 lm	Up&Down

COLORS

■	Code: R 750nm
■	Code: G 750nm
■	Code: B 750nm
■	Code: Y 750nm
<hr/>	
■	Code: WW 3000K
■	Code: NW 4500K
	Code: CW 6000K

DIMENSIONS

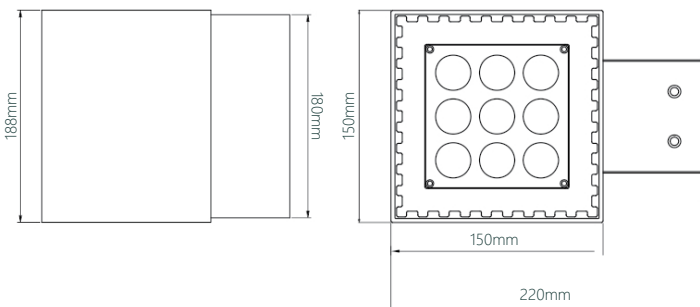

OPTICS

